

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922) 49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Ижевск (3412)26-03-58
Иваново (4932)77-34-06
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Ноябрьск (3496)41-32-12
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сыктывкар (8212)25-95-17
Сургут (3462)77-98-35
Тамбов (4752)50-40-97

Казахстан (772)734-952-31

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Улан-Удэ (3012)59-97-51
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

<https://follett.nt-rt.ru> || fti@nt-rt.ru

Вертикальные лабораторные и аптечные холодильники REF12

REF12 Upright

laboratory and pharmacy refrigerators



Features

Powerful refrigeration system and superior plenum air distribution

- modular refrigeration system with microprocessor controller provides a ± 1 C (1.8 F) performance throughout
- industry-exclusive plenum air distribution delivers cold air at three different levels
- automatic defrost

User-friendly interface

- 7" LCD capacitive touchscreen digital temperature display available in user-programmable C or F
- integral event and data logging with easy downloading via convenient USB port

Protection for your valuable products

- audible and visual high/low temperature, door open, power failure, low battery alarms
- dry contacts for remote alarming

Full stainless steel cabinet and high quality components

- full stainless steel interior and exterior provide resistance to rust and corrosion
- quick-connect RTD product temperature probe easily accessible inside storage cabinet
- dished stainless floor contains spills for easy clean up
- heavy-duty dual casters roll easily and lock securely
- 2.00" (5.08 cm) of non-HFC low GWP/ODP polyurethane insulation
- polyurethane keeps energy costs low
- four heavy-duty coated wire shelves standard

Heavy-duty door for ease of use and energy savings

- dual-pane glass door, lockable
- energy efficient low-E glass coating to reduce energy loss by 30 - 50% compared to non-coated glass
- glass remains condensation-free to 27 C (80 F) at 60% RH
- self-closing hinges lock open at 105 degrees for easy product loading

Cool, energy-efficient LED light

Model configurations					
Storage system	Hinge location ¹	Keypad	Door Configuration	Heated door	Item number
4 shelves	right	no	glass	no	REF12-LB-R00G
4 shelves	left	no	glass	no	REF12-LB-L00G
4 shelves	right	no	stainless	no	REF12-LB-R00S

¹ As facing the unit.

Features (continued)

Warranty

- 2 year parts and labor
 - 5 year compressor parts only
 - optional extended one year warranty (item# EW12)
 - 3 year parts and labor
 - 5 year compressor parts only
 - optional extended three year warranty (item# EW36)
 - 5 year parts and labor
-

Certifications



Commercial Refrigerator
SAFETY US/CA – SA12646

Accessories

Additional shelves (1) (item# 01311976)

NOTE: Maximum of (6) shelves per unit.

Replacement “quick-connect” RTD probe with certificate of NIST-traceable calibration (item# 01140458)

Glycerine, 16 oz (item# 00959296)

Wall bracket kit, seismic anchoring (item# 01319441)

Replacement CRS (Complete Refrigeration System) module (item# 01312529)

NOTE: Accessories ship separately.

Touchscreen display



Heavy-duty coated wire shelves



Specification

Nominal capacity	11.8 cu ft (334 L)
Ventilation clearances	20.00" (50.8 cm) top, 3.00" (7.62 cm) rear

Exterior

W1 Width	23.62" (60.0 cm)
D1 Depth with handle	27.25" (69.2 cm)
Depth with rear ventilation clearance	30.25" (76.8 cm)
H1 Height with casters	72.75" (184.8 cm)
Casters	(4) swiveling dual wheel casters with toe locks
D2 Door swing	46.19" (117.3 cm)

Interior

Height (usable)	51.5" (130.8 cm)
Lighting	(1) energy efficient full length LED light
Storage system	(4) coated wire shelves
Max. number of shelves	(6)
Overall shelf dimensions	18" W x 19" D (45.7 cm x 48.3 cm)
Working load rating per shelf	47 lb (21 kg)

Door configurations

Door	dual-pane glass door or solid stainless steel
Door lock	cylinder type with two keys
Door handle	ADA-height, vertical
Door hinges	self-closing with 105° hold open feature
Gasket	magnetic dart style (replaceable without tools)



Electrical

C1 Electrical 115 V/60/1 (115 - 127 V)	4 run load amps, NEMA 5-15P straight hospital-grade plug. 9.51' (2.9 m) cord set.
Maximum size of branch circuit overcurrent device	15 amps dedicated circuit
On/off switch	at rear

Controls

Temperature display	7" LCD capacitive touchscreen digital temperature display available in user-programmable C or F
C2 3rd party probe access	soft access port on left side of cabinet
Product temperature display probe	(1) quick-connect RTD (± 0.4 C, ± 0.7 F)
Temperature probe calibration	probe calibration in 0.1° increments
Password protection PIN	4 digit password to prevent interface setting/selection changes
Date and time	programmable
Product simulation bottle size	(1) 60 ml
Refrigeration and defrost probes	NTC thermistor type
Refrigeration cycle with probe error	factory set at 8 min on, 15 off, user adjustable
Programmable operating range	2.2 to 10 C (36 to 50 F)
Factory preset	4.4 C

Dimensional drawing

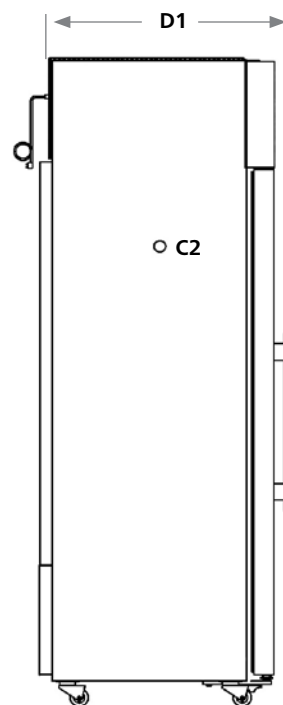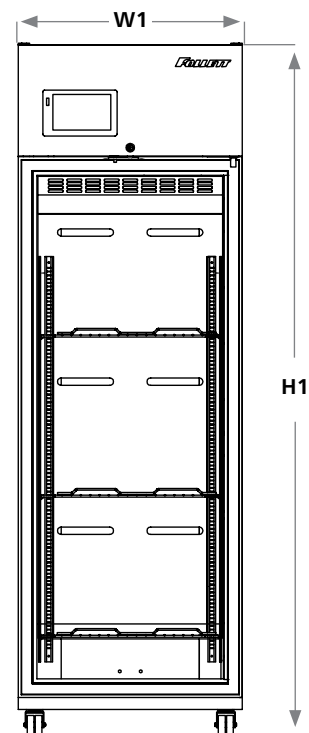

FOLLETT and FOLLETT HEALTHCARE are registered trademarks of Follett Products, LLC, registered in the US. Follett reserves the right to change specifications at any time without obligation.

Alarming

High and low product temperature alarm	audible and visual, user programmable set points in C or F
Power failure alarm	audible and visual
Door ajar alarm	audible and visual
Probe error alarm	audible and visual – product temperature probes, refrigeration and defrost
Alarm mute	10 minute ring-back
Alarm volume	0-10 scale
Low battery alert	audible and visual
Back-up battery status	shows voltage level
Min/max temperature log	shows highest and lowest product temperature since last reset occurred
Remote contacts	NO/NC standard, at rear

Data logging

Information log	graphs or displays temperature data and displays chronological event data (50,000 data points)
Data export	USB export capabilities

System performance

Top-to-bottom temperature consistency	± 1 C (1.8 F)
Refrigeration system	integral top-mounted module with air-cooled condenser
Refrigerant and charge	non-CFC R134a refrigerant, 5.46 oz
Air circulation system	ducted air to three storage levels through back plenum openings, front face return
Air temperature pull down	24 to 5 C (75 to 41 F) in 50 minutes
Product simulation bottle temperature pull down	24 to 5 C (75 to 41 F) in 120 minutes
Energy consumption	2.19 kWh/day
BTU/hr normal heat rejection, includes duty cycle (75 F ambient)	802 BTU/hr (235 Watts)
BTU/hr maximum (total) heat rejection, continuous operation (75 F ambient)	1604 BTU/hr (470 Watts)

Shipping

Shipping size	27.00" W x 29.00" D x 81.00" H (68.6 x 73.7 x 205.7 cm)
Approximate refrigeration module net weight	40 lb (18 kg)
Approximate net weight	Solid door – 322 lb (146 kg) Glass door – 362 lb (164 kg)
Approximate ship weight	Solid door – 382 lb (174 kg) Glass door – 420 lb (191 kg)

NOTE: For indoor use only

SHORT FORM SPECIFICATION: Upright refrigerator with 11.8 cu ft (334 L) of nominal capacity. To include (4) coated-wire shelves, adjustable. Environmentally responsible R134a refrigeration system to include an integral top-mounted module with 1/3 hp compressor and air-cooled condenser. 7" LCD capacitive touchscreen with user selectable C or F. Event and data logging with USB download capability. Air circulation system to duct air through back plenum openings with front face return. Storage area to be insulated with non-HFC low GWP/ODP polyurethane insulation. 9' (2.7 m) power cord with NEMA 5-15 90° hospital-grade plug. UL and CUL listed.

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922) 49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Ижевск (3412)26-03-58
Иваново (4932)77-34-06
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Киргизия (996)312-96-26-47

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Ноябрьск (3496)41-32-12
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37

Россия (495)268-04-70

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сыктывкар (8212)25-95-17
Сургут (3462)77-98-35
Тамбов (4752)50-40-97

Казахстан (772)734-952-31

Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Улан-Удэ (3012)59-97-51
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93